



HYDROSPHERE ERCU MINI - ASPRI 15/3

RAINWATER MANAGEMENT SYSTEM WITH TYPE AB BREAK TANK

ITEM CODE: A2.13.530

ADVANTAGES:

- Simple connection
- Wall and floor mounting
- Fully automatic
- Belgaqua approved break tank type AB
- Compact
- Silent operation
- Single pump installation

APPLICATIONS:

- Private residence
- Apartment
- Company


TECHNICAL FEATURES:

Multi-cell self-priming pump:	The pump has an electronic pressure regulator with fixed switch-on pressure, ON/OFF with built-in dry-running protection
Tank:	Made of Polyethylene (color: black) provided for wall mounting
Break tank capacity	10 litre
Control box with LCD display:	For automatic management type RWC 6.3 (see additional information TF product)
Optional:	Electrovalve for cleaning the rainwater well filter and microswitch for the break tank overflow



PUMP ASPRI 15/3

Selection:	1.2 m ³ /h at 3.0 bar
Protection class:	IPX5
Power:	370
Mains voltage:	230 Volts 50 Hz

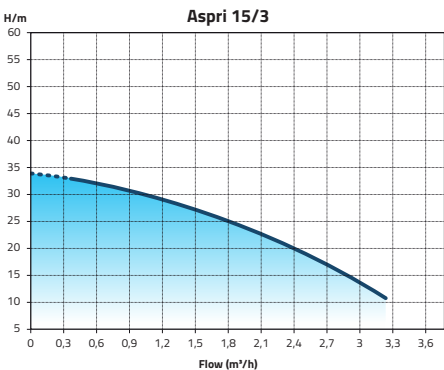

DIMENSIONS & WEIGHT BREAK TANK

Dimensions:	500 x 300 x 750 mm (W x D x H)
Drinking water connection:	3/4" M (max 100 L/min)
Connection after pressure regulator:	1" M
Emergency overflow:	DN50
Weight (without water):	18 kg

RELATED PRODUCTS

ITEM CODE	TYPE	MAX. ROOF AREA WITH A RAIN-FALL OF 200 L/(SXHA)	MAX. ROOF AREA WITH A RAIN-FALL OF 300 L/(SXHA)	MAX. FLOW
A1.54.170	H2Q Duplex filter 1"			
B9.01.355	3P Compact filter	320 M ²	213 M ²	6.4 L/S
B9.01.343	3P Backwash set			
B9.01.365	3P calmed inlet DN100			
B9.01.102	Floating suction 1"			
A6.06.277	HDPE 32mm			